



F1064
TRI1064
VICTORY FLAT BENCH
WITH BACK

8' expanded steel bench with flat seat and back, traditional edge, and in ground mount

Material

The bench is 96.25" long with a flat seat and back. The seat and back are made of 3/4 #9 expanded steel with a diamond pattern and feature a traditional edge. The seat and back are protected by Fusion Advantage™, a plastisol coating with an average .125" thickness and a high-gloss powder coat. The bench seat will support 200 lbs per linear foot.

The supports and legs are made of 2.38" O.D. steel tubing protected by a fade resistant powder coat finish featuring a state of the art primer proven to prevent rusting. They are designed to be mounted 18.38" deep for a sturdy support.

Finish

Fusion Advantage is a heat fused plastisol coating that creates an impervious rustproof barrier and resists UV deterioration, mildew, staining and fading.

The finish has been tested to the requirements of ASTM E1354 and is determined to be in compliance with California Uniform Fire Code 1103.2.1.4.2.

A state of the art primer is applied to all of the under supports, providing extreme rust fighting protection and durability. Treated components exceed the industry standard by 34% in testing by independant sources.

Color

See website or sales representative for color choices.


Assembly

The bench requires some assembly. Stainless steel assembly hardware is included.

TRI1064 model includes tamper resistnat and stainless steel assembly hardware.

Maintenance

The product is virtually maintenance-free and requires only periodic cleaning with a sponge and a solution of mild detergent and water to remove surface dirt. Do not clean with solvent or petroleum based products.

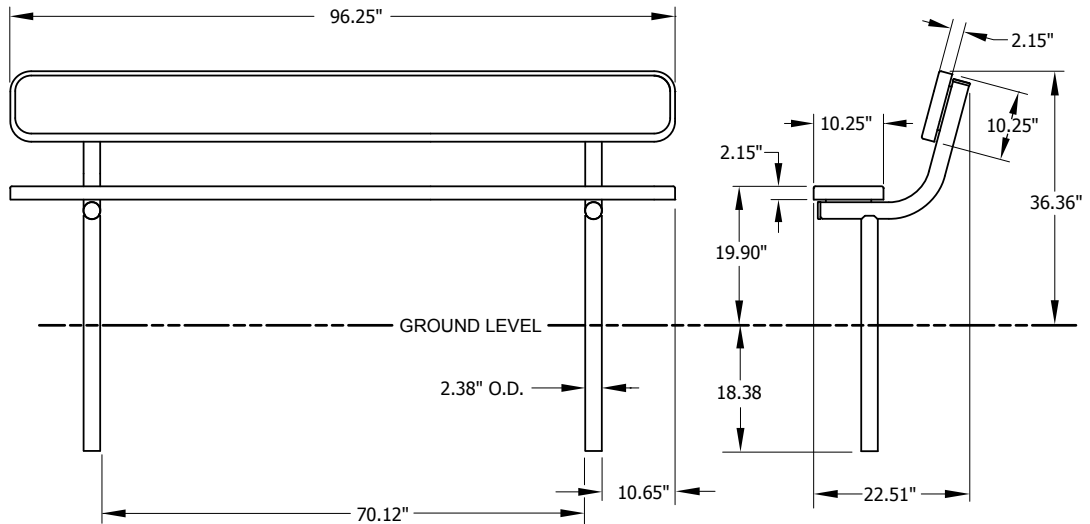

Shipping Information

| Unit Wt. | Unit Shipping Wt. UPS | Unit Shipping Wt. Truck (1+ units) | Unit Ship Size w/Pallet | Max Units per Pallet | Pallet Wt. (98" x 32") | Total No. Pkgs | Shipping Class |
|----------|-----------------------|------------------------------------|-------------------------|----------------------|------------------------|----------------|----------------|
| 124 lbs | N/A | 133 lbs lbs/unit | 24 cu. ft. | 6 | 100 lbs | 2 | 70 |