

F1362 — Ultra 6' Expanded Steel Extra Wide Flat Bench, Inground Mount**6' flat bench with expanded steel seat, rolled edge and steel inground mount legs****Material**

The 6' flat bench seat is composed of $\frac{3}{4}$ " #9 expanded steel with a diamond shaped pattern and features a rolled edge. The bench seat is 72.38" long with an extra wide 32.19" seat and will support 200 lbs. per linear foot.

The bench leg/armrests are made of 2 3/8" O.D. steel tubing and designed to be mounted 15.95" deep for a sturdy support.

Finish

Steel seat is protected by the patented Fusion Advantage™ finish. The plastisol coating has an average thickness of .125" and is encapsulated with a richly tinted, high performance coating that won't rust, fade, peel, chip, crack, mold or mildew. The finish has been tested to the requirements of ASTM E1354 and determined to be compliant with California Uniform Fire Code 1103.2.1.4.2.

Fade-resistant, powder coated steel leg/armrests features a state-of-the-art primer proven to prevent rusting. Treated components exceed the industry standard by 34% in testing by independent sources.

Color

See website or sales representative for color choices.

Assembly

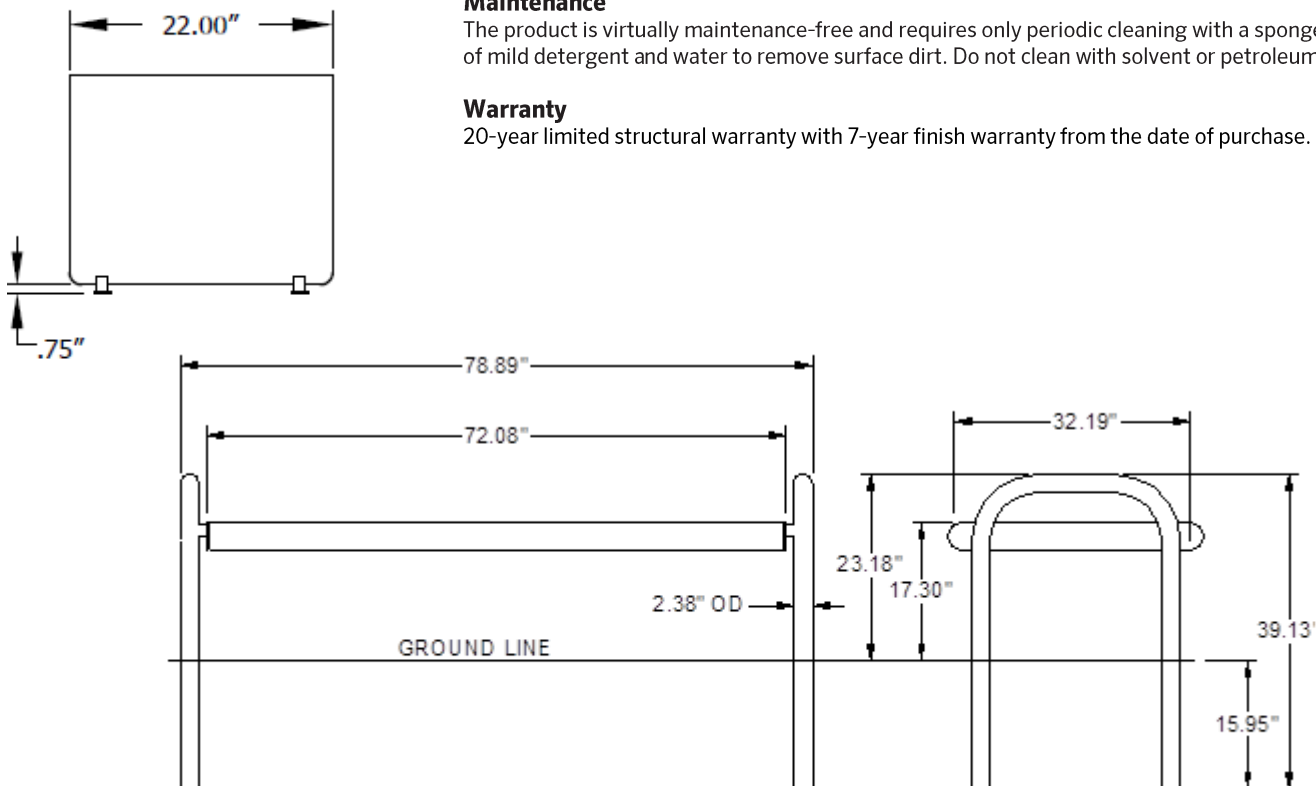
The bench requires some assembly. Stainless steel assembly hardware is included.

Maintenance

The product is virtually maintenance-free and requires only periodic cleaning with a sponge and a solution of mild detergent and water to remove surface dirt. Do not clean with solvent or petroleum base products.

Warranty

20-year limited structural warranty with 7-year finish warranty from the date of purchase. See full details

**SHIPPING INFORMATION**

Unit Weight	Unit Shipping Wt. UPS	Unit Shipping Wt. Truck (1+ Units)	Unit Ship Size w/Pallet	Max Units Per Pallet	Pallet Size/Wt. (32" x 74")	Total No. Pkgs.	Shipping Class
139 lbs.	N/A	153 lbs./unit	29 cu. ft.	5	100	2	70