



L1408M

REFLECTIONS RECEPTACLE



32-gallon plastisol coated, slotted steel receptacle with galvanized spun steel top and black plastic liner

Replacement Parts

Universal Contour Top	F3005
Black Plastic Liner	F1017

Accessories

Traditional Inground Mount	F1094
Traditional Surface Mount	F1098
45° Surface Mount	F1406
45° Inground Mount	F1407
Corkscrew Anchor	A1020

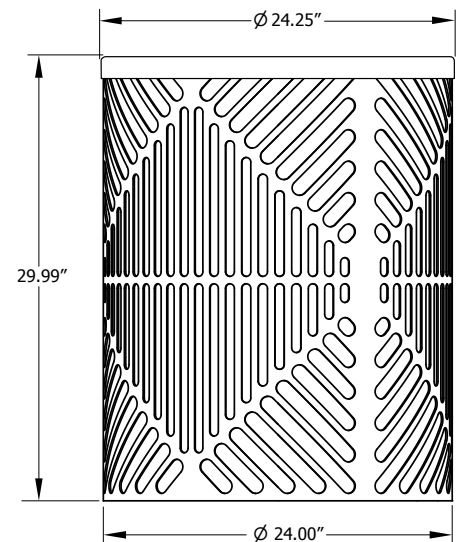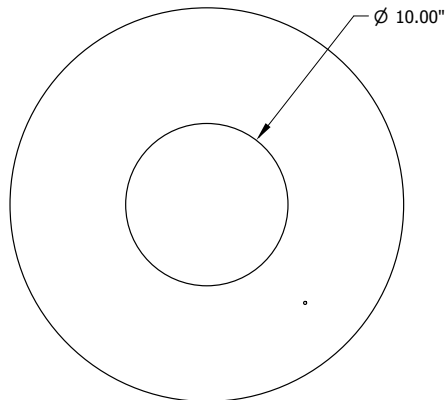

Material

The 32-gallon receptacle body is made of 12-gauge slotted steel with .44" wide vertical slots and .81" wide diagonal slots. A spun steel contour top and plastic liner is included. The receptacle is protected by Fusion Advantage™, a plastisol coating with an average .125" thickness and a high-gloss powder coat.

The contour top is made of 18-gauge galvanized steel protected with a high-gloss powder coat finish. The top features a 10-inch diameter center opening for easy waste disposal and includes a 14-inch web security strap.

The reusable 32-gallon plastic liner is made of black high-density polyethylene.

Options and Accessories

Optional mounting kits for various applications are available.

Finish

Fusion Advantage is a heat fused plastisol coating that creates an impervious rustproof barrier and resists UV deterioration, mildew, staining and fading.

The finish has been tested to the requirements of ASTM E1354 and is determined to be in compliance with California Uniform Fire Code 1103.2.1.4.2.

Color

See website or sales representative for color choices.

Assembly

No assembly is required. Purchase of accessories such as mounting options may require some assembly.

Maintenance

The product is virtually maintenance-free and requires only periodic cleaning with a sponge and a solution of mild detergent and water to remove surface dirt. Do not clean with solvent or petroleum based products.

Shipping Information

Unit Wt.	Unit Shipping Wt. UPS (1 unit)	Unit Shipping Wt. Truck (2+ units)	Unit Ship Size w/Pallet	Max Units per Pallet	Pallet Wt. (48" x 48")	Total No. Pkgs	Shipping Class
76 lbs	100 lbs/unit	84 lbs/unit	32 cu. ft.	8	50 lbs	1	100