
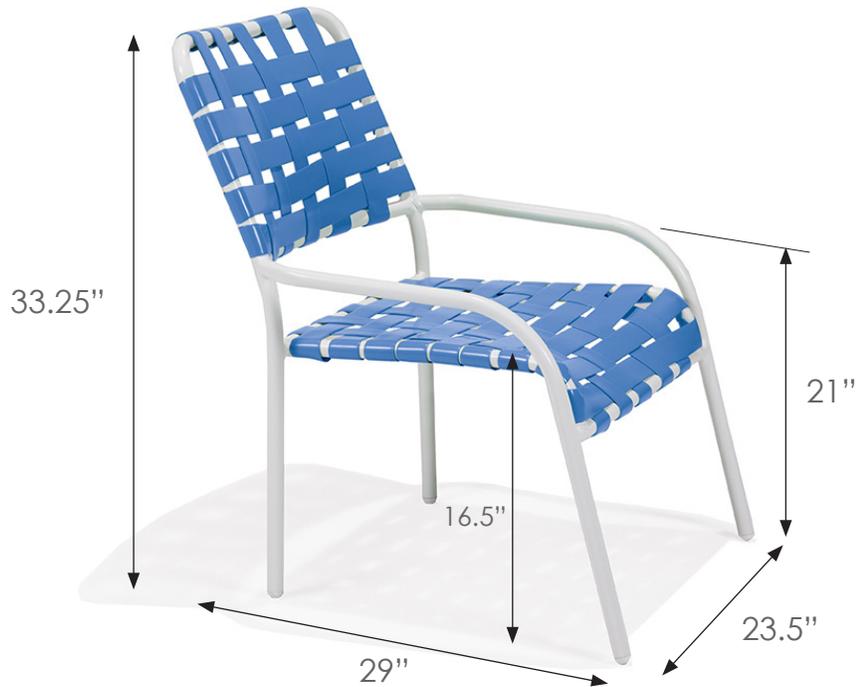


SUMMARY SPECIFICATIONS MODEL  
**M3005CW** OASIS STRAP CHAIR

Unit Weight: 10 lbs.

1"




**FRAMES:** Legs are made from quality 1" x .083 round aluminum extrusion. Tig-Weld at all connecting points.

**POWDER COAT:** The painting process begins with a six (6) stage chemical pre-treatment system, which provides for efficient etching and surface preparation. Frames are thoroughly cleaned in a phosphate bath and sealed with a chrome seal for corrosion resistance, then thoroughly dried in ovens. Powder coatings are electro statically applied to a nominal thickness of three (3) mils with the finest professional grade polyester powder. The frames then pass through an oven heated to 400 degrees Fahrenheit, where the powder melts, covering the metal with a tough, pliable skin.


**VINYL:** Vinyl composite is made of "virgin" vinyl which contains no foreign bonding agents. Strap is 2" wide and contains mildew and UV inhibitors to help keep vinyl looking fresh and clean.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

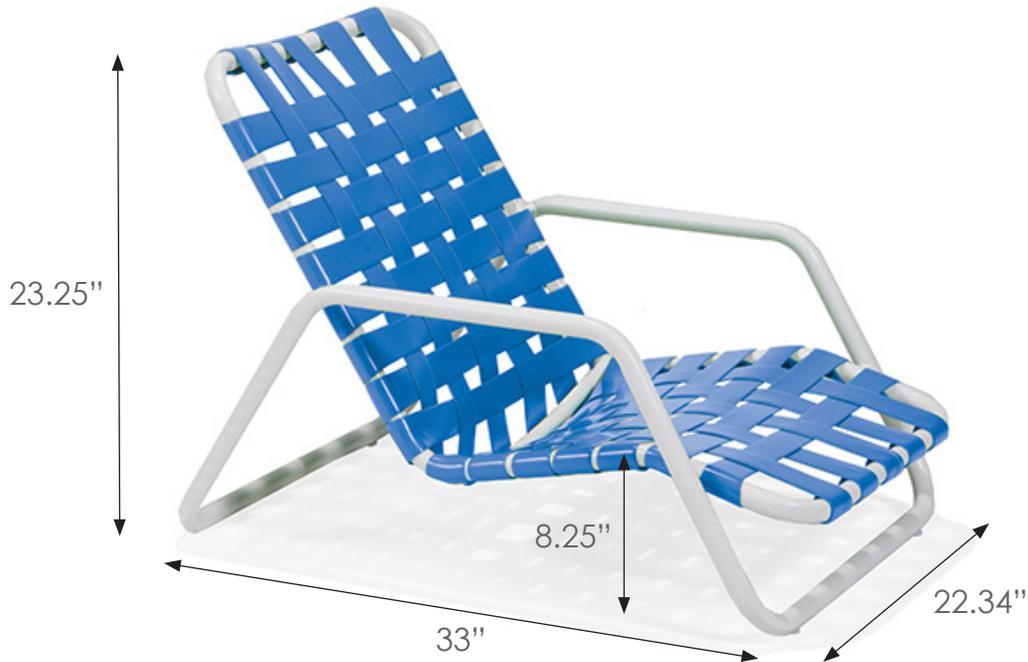SUMMARY SPECIFICATIONS MODEL  
**M4006CW** OASIS STRAP SAND CHAIR

Unit Weight: 9 lbs.

1"




**FRAMES:** Legs are made from quality 1" x .065 round aluminum extrusion. Tig-Weld at all connecting points.

**POWDER COAT:** The painting process begins with a six (6) stage chemical pre-treatment system, which provides for efficient etching and surface preparation. Frames are thoroughly cleaned in a phosphate bath and sealed with a chrome seal for corrosion resistance, then thoroughly dried in ovens. Powder coatings are electro statically applied to a nominal thickness of three (3) mils with the finest professional grade polyester powder. The frames then pass through an oven heated to 400 degrees Fahrenheit, where the powder melts, covering the metal with a tough, pliable skin.


**VINYL:** Vinyl composite is made of "virgin" vinyl which contains no foreign bonding agents. Strap is 2" wide and contains mildew and UV inhibitors to help keep vinyl looking fresh and clean.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

SUMMARY SPECIFICATIONS MODEL  
**M4006CWHB** OASIS STRAP SAND CHAIR

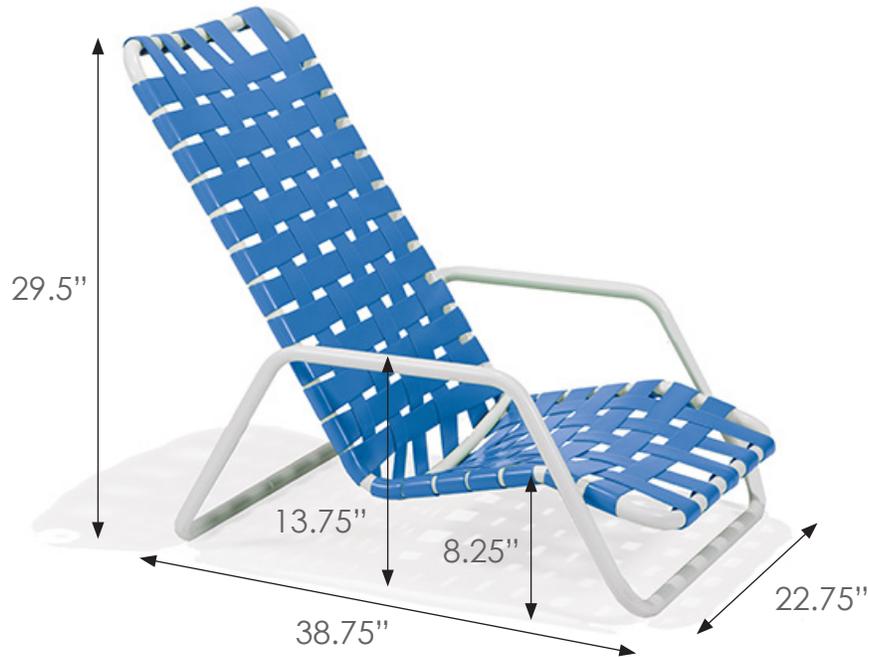

Unit Weight: 10 lbs.



FRAMES: Legs are made from quality 1" x .065 round aluminum extrusion. Tig-Weld at all connecting points.

POWDER COAT: The painting process begins with a six (6) stage chemical pre-treatment system, which provides for efficient etching and surface preparation. Frames are thoroughly cleaned in a phosphate bath and sealed with a chrome seal for corrosion resistance, then thoroughly dried in ovens. Powder coatings are electro statically applied to a nominal thickness of three (3) mils with the finest professional grade polyester powder. The frames then pass through an oven heated to 400 degrees Fahrenheit, where the powder melts, covering the metal with a tough, pliable skin.


VINYL: Vinyl composite is made of "virgin" vinyl which contains no foreign bonding agents. Strap is 2" wide and contains mildew and UV inhibitors to help keep vinyl looking fresh and clean.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

SUMMARY SPECIFICATIONS MODEL  
**M4005CW** OASIS STRAP BARSTOOL

Unit Weight: 14 lbs.

1.25"




**FRAMES:** Legs are made from quality 1.25" x .065 round aluminum extrusion. Tig-Weld at all connecting points.

**POWDER COAT:** The painting process begins with a six (6) stage chemical pre-treatment system, which provides for efficient etching and surface preparation. Frames are thoroughly cleaned in a phosphate bath and sealed with a chrome seal for corrosion resistance, then thoroughly dried in ovens. Powder coatings are electro statically applied to a nominal thickness of three (3) mils with the finest professional grade polyester powder. The frames then pass through an oven heated to 400 degrees Fahrenheit, where the powder melts, covering the metal with a tough, pliable skin.


**VINYL:** Vinyl composite is made of "virgin" vinyl which contains no foreign bonding agents. Strap is 2" wide and contains mildew and UV inhibitors to help keep vinyl looking fresh and clean.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

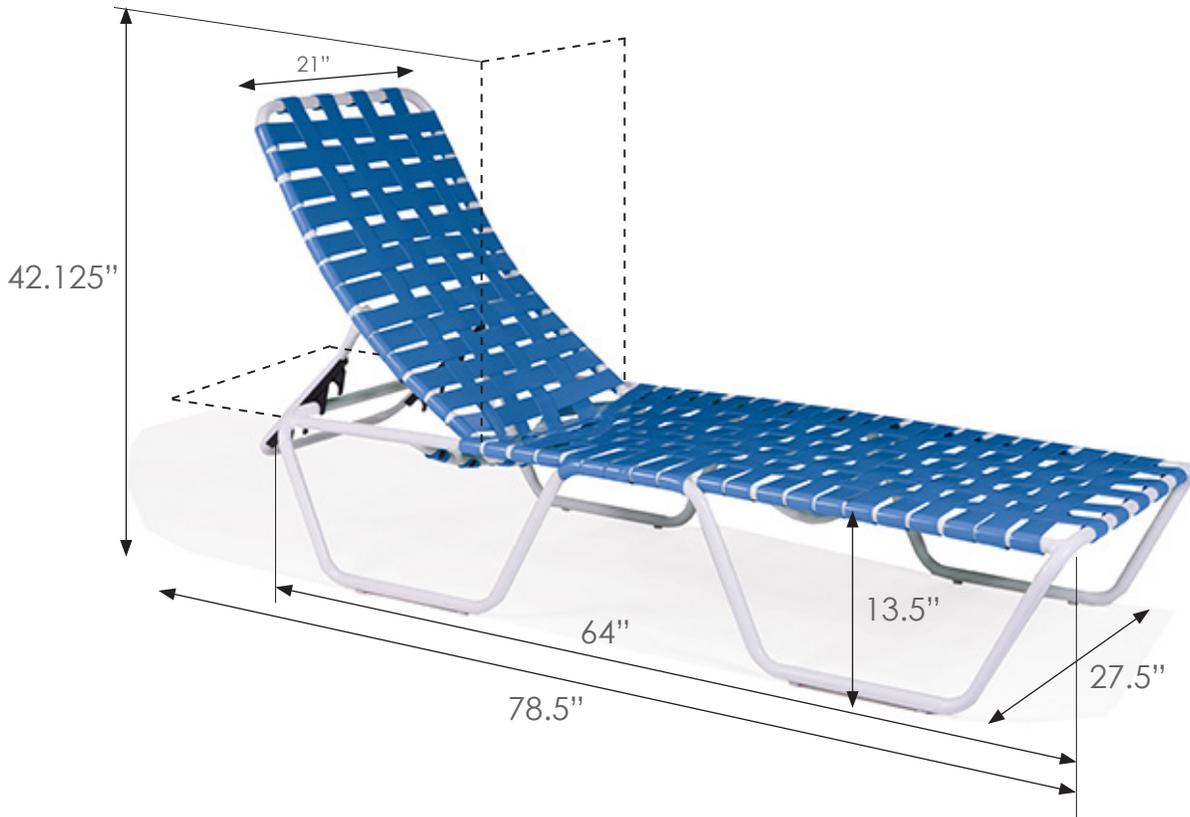SUMMARY SPECIFICATIONS MODEL  
**M3105CW** OASIS CHAISE LOUNGE

Unit Weight: 23 lbs.

1"



**FRAME:** Base legs are made from quality 1" round x .063 aluminum extrusion, Tig-Weld at all connecting points.


**POWDER COAT:** The painting process begins with a six (6) stage chemical pre-treatment system, which provides for efficient etching and surface preparation. Frames are thoroughly cleaned in a phosphate bath and sealed with a chrome seal for corrosion resistance, then thoroughly dried in ovens. Powder coatings are electro statically applied to a nominal thickness of three (3) mils with the finest professional grade polyester powder. The frames then pass through an oven heated to 400 degrees Fahrenheit, where the powder melts, covering the metal with a tough, pliable skin.

**VINYL:** Vinyl composite is made of "virgin" vinyl which contains no foreign bonding agents. Strap is 2" wide and contains mildew and UV inhibitors to help keep vinyl looking fresh and clean.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.




SUMMARY SPECIFICATIONS TROPIC CRAFT CASUALS OASIS  
MODEL **M3105HCW** ELEVATED CHAISE LOUNGE  
ADA COMPLIANT

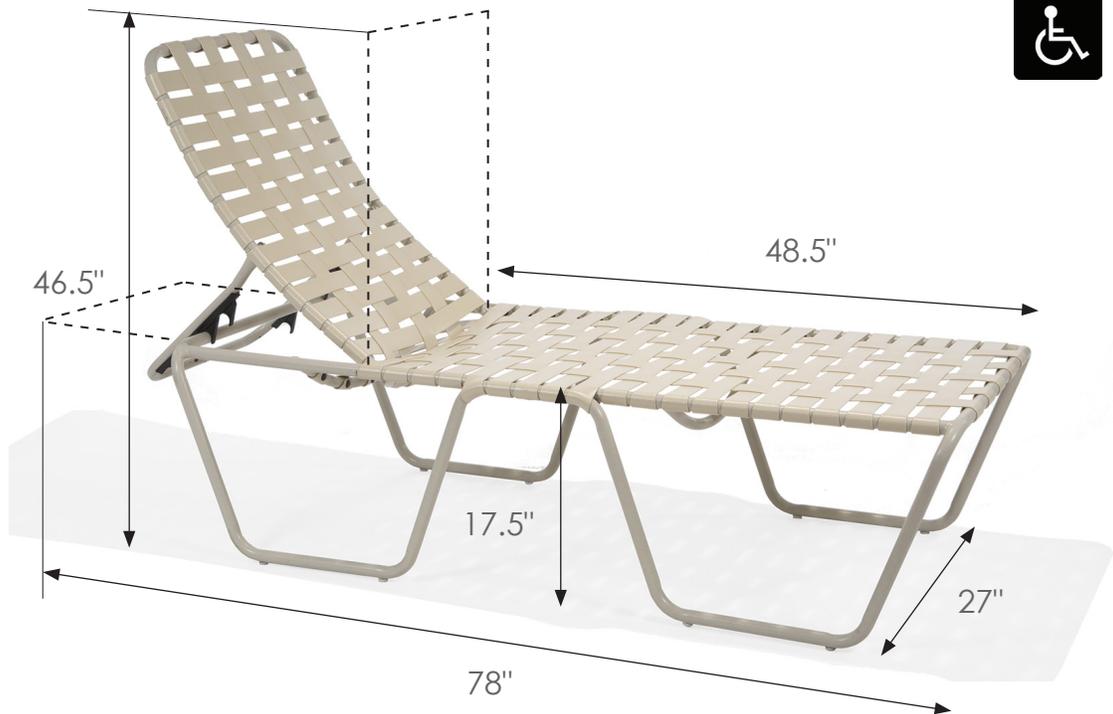

Unit Weight: 25 lbs.

Also available with skid plates- **M3205HCW**

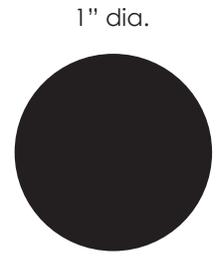

Frame Profile

FRAMES: Frame structure is made from commercial grade, non-rusting aluminum.


VINYL: Vinyl composite is made of "virgin" vinyl which contains no foreign bonding agents. Strap is 2" wide and contains mildew and UV inhibitors to help keep vinyl looking fresh and clean.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

SUMMARY SPECIFICATIONS MODEL  
**M4009S** OASIS SLING SAND CHAIR

Unit Weight: 9 lbs.

1"



**FRAMES:** Legs are made from quality 1" x .065 round aluminum extrusion. Tig-Weld at all connecting points.

**POWDER COAT:** The painting process begins with a six (6) stage chemical pre-treatment system, which provides for efficient etching and surface preparation. Frames are thoroughly cleaned in a phosphate bath and sealed with a chrome seal for corrosion resistance, then thoroughly dried in ovens. Powder coatings are electro statically applied to a nominal thickness of three (3) mils with the finest professional grade polyester powder. The frames then pass through an oven heated to 400 degrees Fahrenheit, where the powder melts, covering the metal with a tough, pliable skin.


**FABRIC:** Winston woven vinyl fabrics are made from weather weave, an open weave, vinyl-coated, polyester fiber fabric. Ultraviolet stabilizers have been added to inhibit fading, deterioration and mildew.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

SUMMARY SPECIFICATIONS MODEL  
**M4005S** OASIS SLING BARSTOOL

Unit Weight: 11 lbs.

1.25"



**FRAMES:** Legs are made from quality 1.25" x .065 round aluminum extrusion. Tig-Weld at all connecting points.

**POWDER COAT:** The painting process begins with a six (6) stage chemical pre-treatment system, which provides for efficient etching and surface preparation. Frames are thoroughly cleaned in a phosphate bath and sealed with a chrome seal for corrosion resistance, then thoroughly dried in ovens. Powder coatings are electro statically applied to a nominal thickness of three (3) mils with the finest professional grade polyester powder. The frames then pass through an oven heated to 400 degrees Fahrenheit, where the powder melts, covering the metal with a tough, pliable skin.


**FABRIC:** Winston woven vinyl fabrics are made from weather weave, an open weave, vinyl-coated, polyester fiber fabric. Ultraviolet stabilizers have been added to inhibit fading, deterioration and mildew.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

SUMMARY SPECIFICATIONS MODEL  
**M4006S** OASIS SLING SAND CHAIR

Unit Weight: 8 lbs.

1"




**FRAMES:** Legs are made from quality 1" x .065 round aluminum extrusion. Tig-Weld at all connecting points.

**POWDER COAT:** The painting process begins with a six (6) stage chemical pre-treatment system, which provides for efficient etching and surface preparation. Frames are thoroughly cleaned in a phosphate bath and sealed with a chrome seal for corrosion resistance, then thoroughly dried in ovens. Powder coatings are electro statically applied to a nominal thickness of three (3) mils with the finest professional grade polyester powder. The frames then pass through an oven heated to 400 degrees Fahrenheit, where the powder melts, covering the metal with a tough, pliable skin.


**FABRIC:** Winston woven vinyl fabrics are made from weather weave, an open weave, vinyl-coated, polyester fiber fabric. Ultraviolet stabilizers have been added to inhibit fading, deterioration and mildew.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

SUMMARY SPECIFICATIONS TROPIC CRAFT CASUALS OASIS  
MODEL **M4102HS** OASIS ELEVATED SLING CHAISE LOUNGE  
ADA COMPLIANT

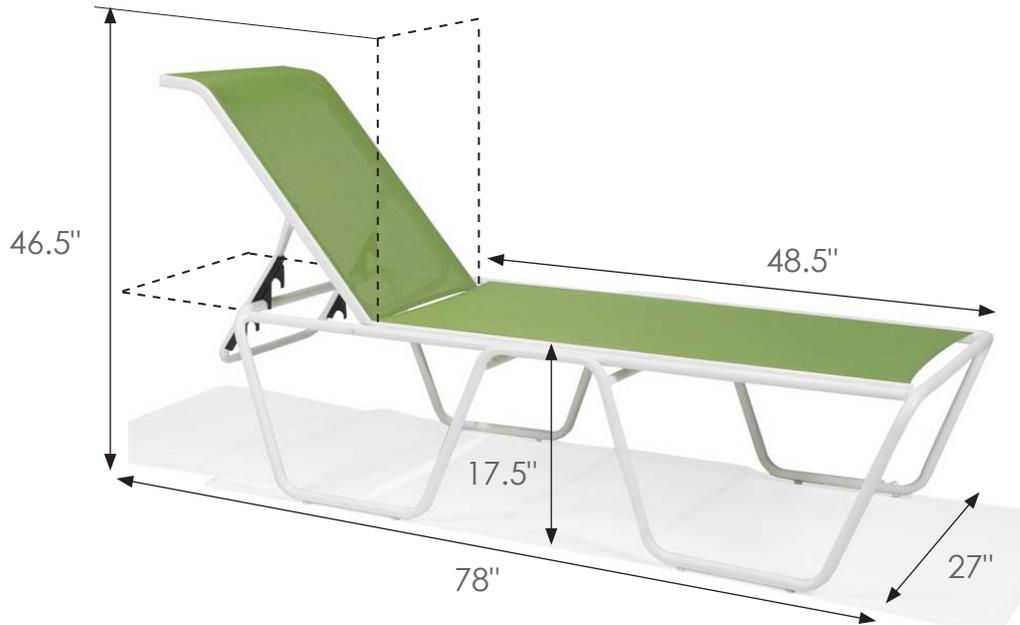


Unit Weight: 24 lbs.

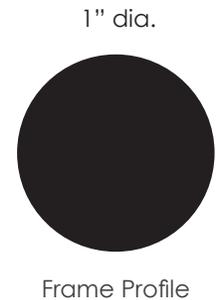

FRAMES: Frame structure is made from commercial grade, non-rusting aluminum.


FABRIC: Woven vinyl fabrics (used primarily as sling material) are made from weather weave, an open weave, vinyl-coated, polyester fiber fabric. Ultraviolet stabilizers have been added to inhibit fading, deterioration and mildew.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

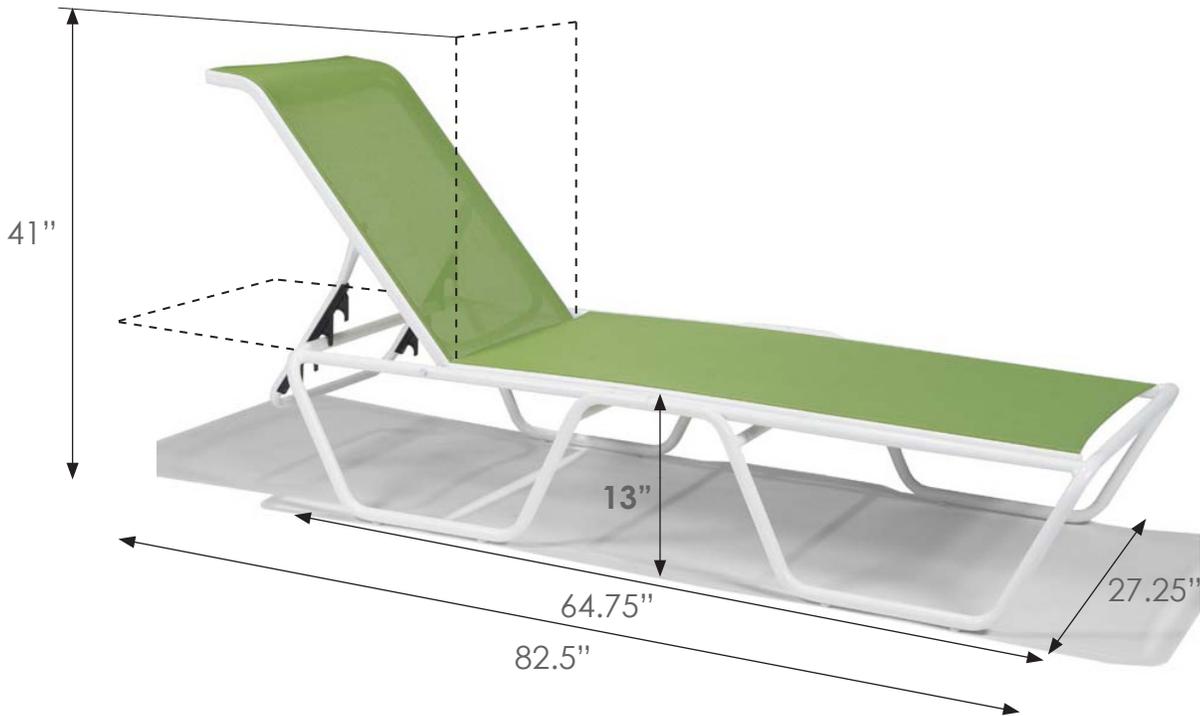SUMMARY SPECIFICATIONS MODEL  
**M4102S** OASIS SLING CHAISE

Unit Weight: 21 lbs.

1"



**FRAMES:** Base sides are made from quality 1" x .083 round aluminum extrusion. All other tubular components are made from aluminum extrusions with wall thicknesses of .062" to .065". Tig-Weld at all connecting points. Back is attached to frame with stainless steel hardware. Nylon adjustable back ratchets are constructed of virgin nylon.

**POWDER COAT:** The painting process begins with a six (6) stage chemical pre-treatment system, which provides for efficient etching and surface preparation. Frames are thoroughly cleaned in a phosphate bath and sealed with a chrome seal for corrosion resistance, then thoroughly dried in ovens. Powder coatings are electro statically applied to a nominal thickness of three (3) mils with the finest professional grade polyester powder. The frames then pass through an oven heated to 400 degrees Fahrenheit, where the powder melts, covering the metal with a tough, pliable skin.

**FABRIC:** Winston woven vinyl fabrics are made from weather weave, an open weave, vinyl-coated, polyester fiber fabric. Ultraviolet stabilizers have been added to inhibit fading, deterioration and mildew.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.