

**RC600M — Signature 6' Contour Bench with Divided Seating**

**6' contour bench with perforated steel seats and backs, steel armrests and cast aluminum portable/surface mount legs**

**Material**

The 6' contour bench is constructed using cast aluminum legs with 14-gauge perforated steel seats/backs and 12-gauge steel end plates. The seats are mounted to an 11-gauge tube support. The armrests are made of .25" formed steel. Seat and end panels have a .5" square perforated design. Each seat is 23" wide and 25.13" deep with an overall bench length of 84.75". The bench seat will support 200 lbs. per linear foot.

The bench is designed to be portable for flexibility or surface mounted using predrilled .6" diameter holes in feet to prevent movement; optional surface mount kits are available. The legs have plastic caps to protect the floor or supporting surface.

**Finish**

Fade-resistant, powder coated cast aluminum and steel components feature a state-of-the-art primer proven to prevent rusting. Treated components exceed the industry standard by 34% in testing by independent sources.

**Color**

See website or sales representative for color choices.

**Assembly**

The bench requires some assembly. Stainless steel assembly hardware is included. Using an optional hold down kit may require some assembly.

**Maintenance**

The product is virtually maintenance-free and requires only periodic cleaning with a sponge and a solution of mild detergent and water to remove surface dirt. Do not clean with solvent or petroleum base products.

**Warranty**



20-year limited structural warranty with 7-year finish warranty against fading from the date of purchase.



**Accessories**

Hold Down Kit

RHTMHL D

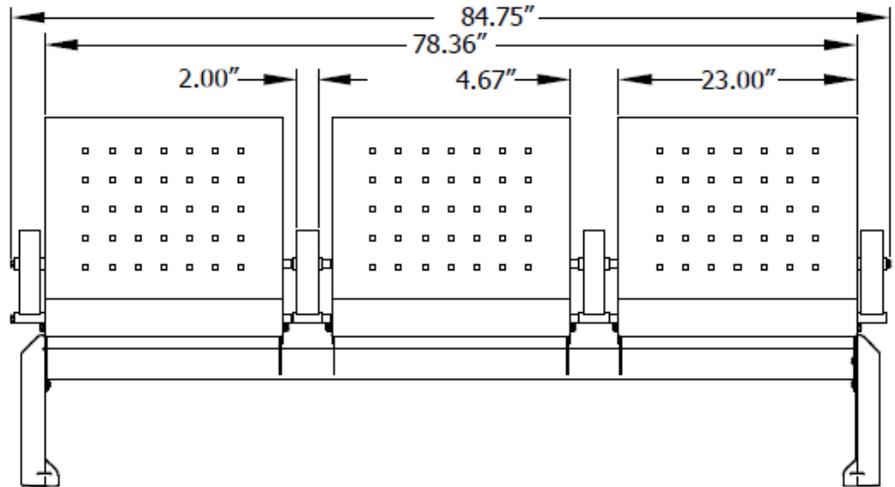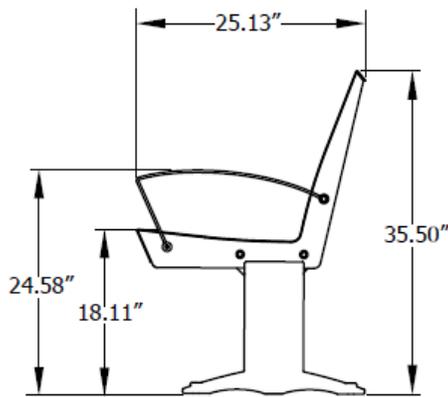

**SHIPPING INFORMATION**

Unit Weight	Unit Shipping Wt. UPS	Unit Shipping Wt. Truck (1+ Unit)	Unit Ship Size w/Pallet	Max Units Per Pallet	Pallet Size/Wt. (78" x 32")	Total No. Pkgs.	Shipping Class
141 lbs.	N/A	153 lbs.	31 cu. ft.	2	100 lbs.	7	125