


SUMMARY SPECIFICATIONS MODEL
M4401PS VISION PADDED SLING CHAIR

Chairs stack in "nesting stair-step". No more than 4 chairs are recommended for single stack for safety.

Arm & Front
Leg Extrusion
Profile

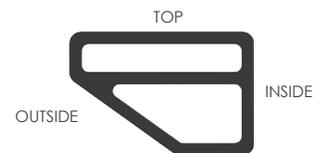

Unit Weight: 14 lbs.

FRAMES: Chair legs are made from quality 1" x 1 1/2" x .090 aluminum extrusion, Tig-Welded at all connecting points. Right seat and back sling rails are attached to frame with stainless steel hardware.

POWDER COAT: The painting process begins with a six (6) stage chemical pre-treatment system, which provides for efficient etching and surface preparation. Frames are thoroughly cleaned in a phosphate bath and sealed with a chrome seal for corrosion resistance, then thoroughly dried in ovens. Powder coatings are electro statically applied to a nominal thickness of three (3) mils with the finest professional grade polyester powder. The frames then pass through an oven heated to 400 degrees Fahrenheit, where the powder melts, covering the metal with a tough, pliable skin.

FABRIC: Winston woven vinyl fabrics are made from weather weave, an open weave, vinyl-coated, polyester fiber fabric. Ultraviolet stabilizers have been added to inhibit fading, deterioration and mildew.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

SUMMARY SPECIFICATIONS VISION SLING
MODEL **M4410PS** NESTING PADDED SLING SIDE CHAIR



Arm & Front
Leg Extrusion
Profile



Unit Weight: 11 lbs.

FRAMES: Frame structure is made from commercial grade, non-rusting aluminum.


FABRIC: Woven vinyl fabrics (used primarily as sling material) are made from weather weave, an open weave, vinyl-coated, polyester fiber fabric. Ultraviolet stabilizers have been added to inhibit fading, deterioration and mildew.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

SUMMARY SPECIFICATIONS VISION SLING
MODEL **M4405PSB** PADDED SLING BALCONY HEIGHT STOOL



Unit Weight: 18 lbs.

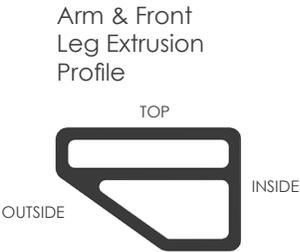

FRAMES: Frame structure is made from commercial grade, non-rusting aluminum.


FABRIC: Woven vinyl fabrics (used primarily as sling material) are made from weather weave, an open weave, vinyl-coated, polyester fiber fabric. Ultraviolet stabilizers have been added to inhibit fading, deterioration and mildew.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

SUMMARY SPECIFICATIONS MODEL
M4405PS VISION PADDED SLING BARSTOOL



Arm & Front
Leg Extrusion
Profile

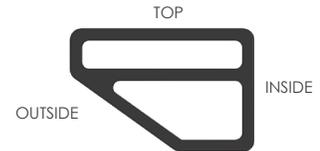

Unit Weight: 19 lbs.

FRAMES: Chair legs are made from quality 1" x 1 1/2" x .090 aluminum extrusion, Tig-Welded at all connecting points. Right seat and back sling rails are attached to frame with stainless steel hardware.

POWDER COAT: The painting process begins with a six (6) stage chemical pre-treatment system, which provides for efficient etching and surface preparation. Frames are thoroughly cleaned in a phosphate bath and sealed with a chrome seal for corrosion resistance, then thoroughly dried in ovens. Powder coatings are electro statically applied to a nominal thickness of three (3) mils with the finest professional grade polyester powder. The frames then pass through an oven heated to 400 degrees Fahrenheit, where the powder melts, covering the metal with a tough, pliable skin.

FABRIC: Winston woven vinyl fabrics are made from weather weave, an open weave, vinyl-coated, polyester fiber fabric. Ultraviolet stabilizers have been added to inhibit fading, deterioration and mildew.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

SUMMARY SPECIFICATIONS MODEL
M4407PS VISION PADDED SLING SPA CHAIR



Unit Weight: 13 lbs.




FRAMES: Chair legs are made from quality 1" x 1 1/2" x .090 aluminum extrusion, Tig-Welded at all connecting points. Right seat and back sling rails are attached to frame with stainless steel hardware.

POWDER COAT: The painting process begins with a six (6) stage chemical pre-treatment system, which provides for efficient etching and surface preparation. Frames are thoroughly cleaned in a phosphate bath and sealed with a chrome seal for corrosion resistance, then thoroughly dried in ovens. Powder coatings are electro statically applied to a nominal thickness of three (3) mils with the finest professional grade polyester powder. The frames then pass through an oven heated to 400 degrees Fahrenheit, where the powder melts, covering the metal with a tough, pliable skin.

FABRIC: Winston woven vinyl fabrics are made from weather weave, an open weave, vinyl-coated, polyester fiber fabric. Ultraviolet stabilizers have been added to inhibit fading, deterioration and mildew.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

SUMMARY SPECIFICATIONS MODEL
M4409PS VISION PADDED SLING CHAISE

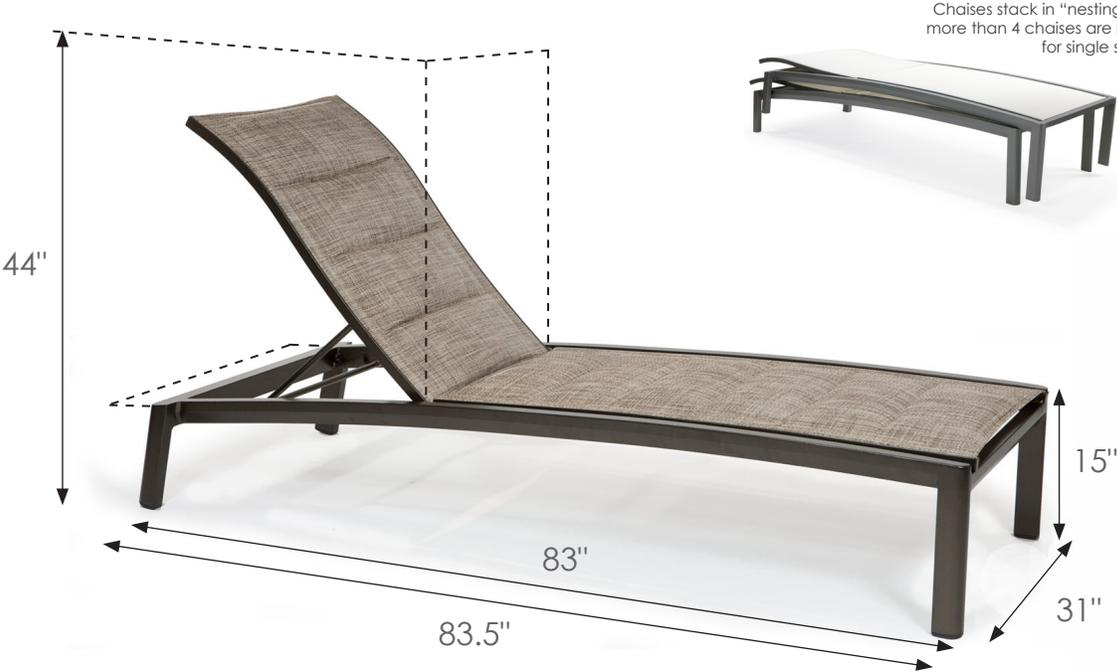

Unit Weight: 36 lbs.

FRAMES: Chair legs are made from quality 1" x 1 1/2" x .090 aluminum extrusion, Tig-Welded at all connecting points. Right seat and back sling rails are attached to frame with stainless steel hardware.

POWDER COAT: The painting process begins with a six (6) stage chemical pre-treatment system, which provides for efficient etching and surface preparation. Frames are thoroughly cleaned in a phosphate bath and sealed with a chrome seal for corrosion resistance, then thoroughly dried in ovens. Powder coatings are electro statically applied to a nominal thickness of three (3) mils with the finest professional grade polyester powder. The frames then pass through an oven heated to 400 degrees Fahrenheit, where the powder melts, covering the metal with a tough, pliable skin.

FABRIC: Winston woven vinyl fabrics are made from weather weave, an open weave, vinyl-coated, polyester fiber fabric. Ultraviolet stabilizers have been added to inhibit fading, deterioration and mildew.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

SUMMARY SPECIFICATIONS MODEL
M4409HPS VISION ELEVATED PADDED SLING CHAISE



Unit Weight: 37 lbs.


FRAMES: Chair legs are made from quality 1" x 1 1/2" x .090 aluminum extrusion, Tig-Welded at all connecting points. Right seat and back sling rails are attached to frame with stainless steel hardware.

POWDER COAT: The painting process begins with a six (6) stage chemical pre-treatment system, which provides for efficient etching and surface preparation. Frames are thoroughly cleaned in a phosphate bath and sealed with a chrome seal for corrosion resistance, then thoroughly dried in ovens. Powder coatings are electro statically applied to a nominal thickness of three (3) mils with the finest professional grade polyester powder. The frames then pass through an oven heated to 400 degrees Fahrenheit, where the powder melts, covering the metal with a tough, pliable skin.

FABRIC: Winston woven vinyl fabrics are made from weather weave, an open weave, vinyl-coated, polyester fiber fabric. Ultraviolet stabilizers have been added to inhibit fading, deterioration and mildew.


Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

SUMMARY SPECIFICATIONS MODEL
M4401S VISION SLING CHAIR

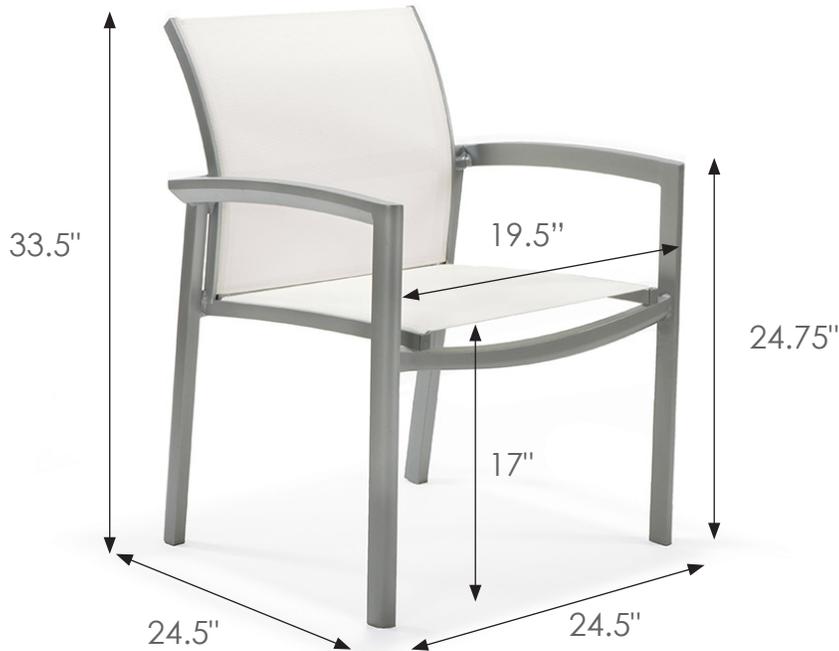

Chairs stack in "nesting stair-step". No more than 4 chairs are recommended for single stack for safety.

Arm & Front Leg Extrusion Profile

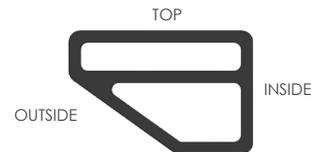

Unit Weight: 13 lbs.

FRAMES: Chair legs are made from quality 1" x 1 1/2" x .090 aluminum extrusion, Tig-Welded at all connecting points. Right seat and back sling rails are attached to frame with stainless steel hardware.

POWDER COAT: The painting process begins with a six (6) stage chemical pre-treatment system, which provides for efficient etching and surface preparation. Frames are thoroughly cleaned in a phosphate bath and sealed with a chrome seal for corrosion resistance, then thoroughly dried in ovens. Powder coatings are electro statically applied to a nominal thickness of three (3) mils with the finest professional grade polyester powder. The frames then pass through an oven heated to 400 degrees Fahrenheit, where the powder melts, covering the metal with a tough, pliable skin.

FABRIC: Winston woven vinyl fabrics are made from weather weave, an open weave, vinyl-coated, polyester fiber fabric. Ultraviolet stabilizers have been added to inhibit fading, deterioration and mildew.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.




SUMMARY SPECIFICATIONS VISION SLING
MODEL **M4410S** NESTING SLING SIDE CHAIR



Unit Weight: 11 lbs.

Leg & Seat
Extrusion Profile

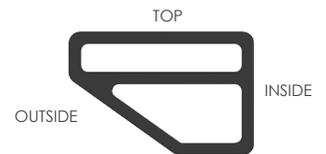

FRAMES: Frame structure is made from commercial grade, non-rusting aluminum.

FABRIC: Woven vinyl fabrics (used primarily as sling material) are made from weather weave, an open weave, vinyl-coated, polyester fiber fabric. Ultraviolet stabilizers have been added to inhibit fading, deterioration and mildew.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.




SUMMARY SPECIFICATIONS VISION SLING
MODEL **M4405SB** BALCONY HEIGHT STOOL



Unit Weight: 18 lbs.


Arm & Front
Leg Extrusion
Profile

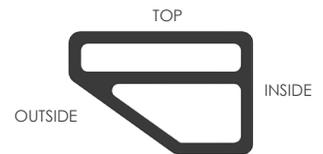

FRAMES: Frame structure is made from commercial grade, non-rusting aluminum.

FABRIC: Woven vinyl fabrics (used primarily as sling material) are made from weather weave, an open weave, vinyl-coated, polyester fiber fabric. Ultraviolet stabilizers have been added to inhibit fading, deterioration and mildew.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

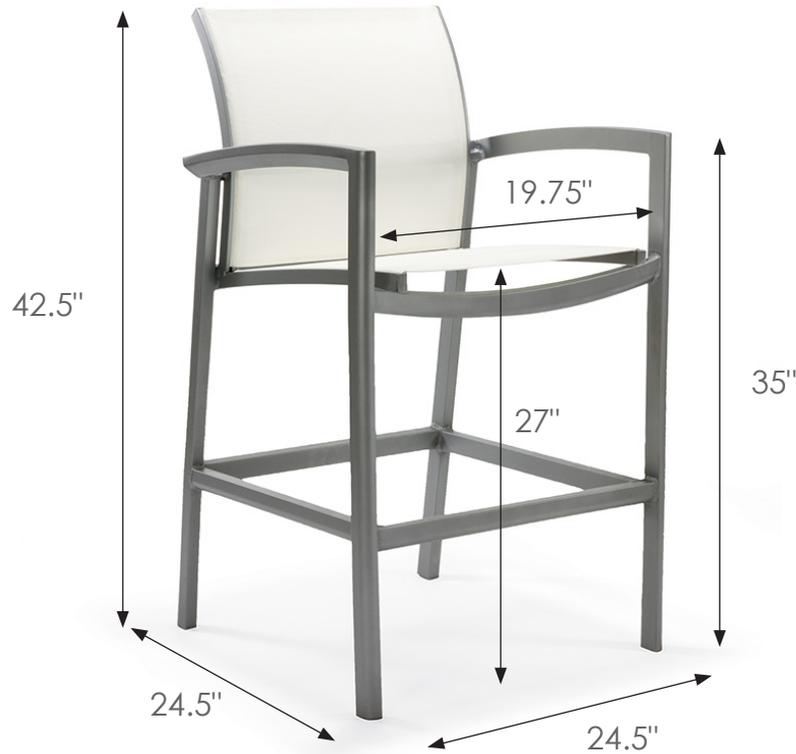SUMMARY SPECIFICATIONS MODEL
M4405S VISION SLING BAR STOOLArm & Front
Leg Extrusion
Profile

Unit Weight: 19 lbs.

FRAMES: Chair legs are made from quality 1" x 1 1/2" x .090 aluminum extrusion, Tig-Welded at all connecting points. Right seat and back sling rails are attached to frame with stainless steel hardware.

POWDER COAT: The painting process begins with a six (6) stage chemical pre-treatment system, which provides for efficient etching and surface preparation. Frames are thoroughly cleaned in a phosphate bath and sealed with a chrome seal for corrosion resistance, then thoroughly dried in ovens. Powder coatings are electro statically applied to a nominal thickness of three (3) mils with the finest professional grade polyester powder. The frames then pass through an oven heated to 400 degrees Fahrenheit, where the powder melts, covering the metal with a tough, pliable skin.

FABRIC: Winston woven vinyl fabrics are made from weather weave, an open weave, vinyl-coated, polyester fiber fabric. Ultraviolet stabilizers have been added to inhibit fading, deterioration and mildew.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

SUMMARY SPECIFICATIONS MODEL
M4407S VISION SLING SPA CHAIR



Arm & Front
Leg Extrusion
Profile




Unit Weight: 12 lbs.

FRAMES: Chair legs are made from quality 1" x 1 ½" x .090 aluminum extrusion, Tig-Welded at all connecting points. Right seat and back sling rails are attached to frame with stainless steel hardware.

POWDER COAT: The painting process begins with a six (6) stage chemical pre-treatment system, which provides for efficient etching and surface preparation. Frames are thoroughly cleaned in a phosphate bath and sealed with a chrome seal for corrosion resistance, then thoroughly dried in ovens. Powder coatings are electro statically applied to a nominal thickness of three (3) mils with the finest professional grade polyester powder. The frames then pass through an oven heated to 400 degrees Fahrenheit, where the powder melts, covering the metal with a tough, pliable skin.

FABRIC: Winston woven vinyl fabrics are made from weather weave, an open weave, vinyl-coated, polyester fiber fabric. Ultraviolet stabilizers have been added to inhibit fading, deterioration and mildew.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

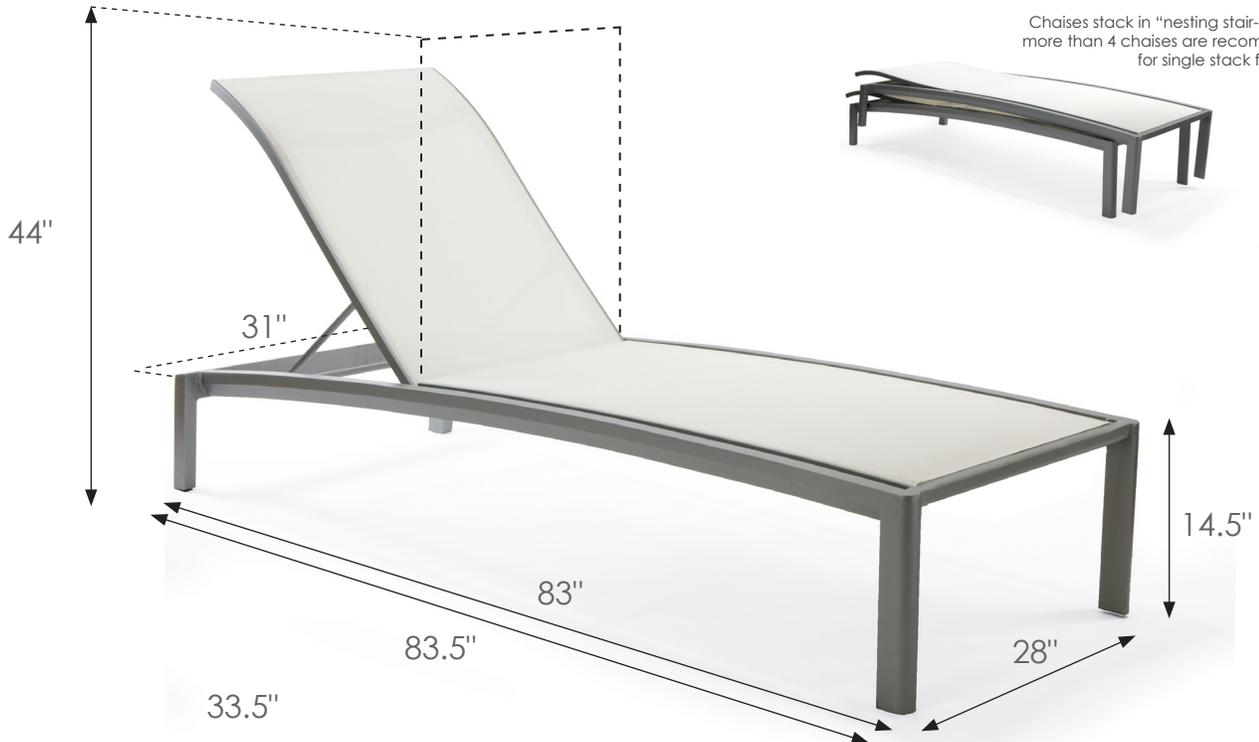SUMMARY SPECIFICATIONS MODEL
M4409S VISION SLING CHAISE

Unit Weight: 34 lbs.


FRAMES: Chair legs are made from quality 1" x 1 ½" x .090 aluminum extrusion, Tig-Welded at all connecting points. Right seat and back sling rails are attached to frame with stainless steel hardware.

POWDER COAT: The painting process begins with a six (6) stage chemical pre-treatment system, which provides for efficient etching and surface preparation. Frames are thoroughly cleaned in a phosphate bath and sealed with a chrome seal for corrosion resistance, then thoroughly dried in ovens. Powder coatings are electro statically applied to a nominal thickness of three (3) mils with the finest professional grade polyester powder. The frames then pass through an oven heated to 400 degrees Fahrenheit, where the powder melts, covering the metal with a tough, pliable skin.

FABRIC: Winston woven vinyl fabrics are made from weather weave, an open weave, vinyl-coated, polyester fiber fabric. Ultraviolet stabilizers have been added to inhibit fading, deterioration and mildew.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.

SUMMARY SPECIFICATIONS MODEL
M4409HS ELEVATED VISION SLING CHAISE

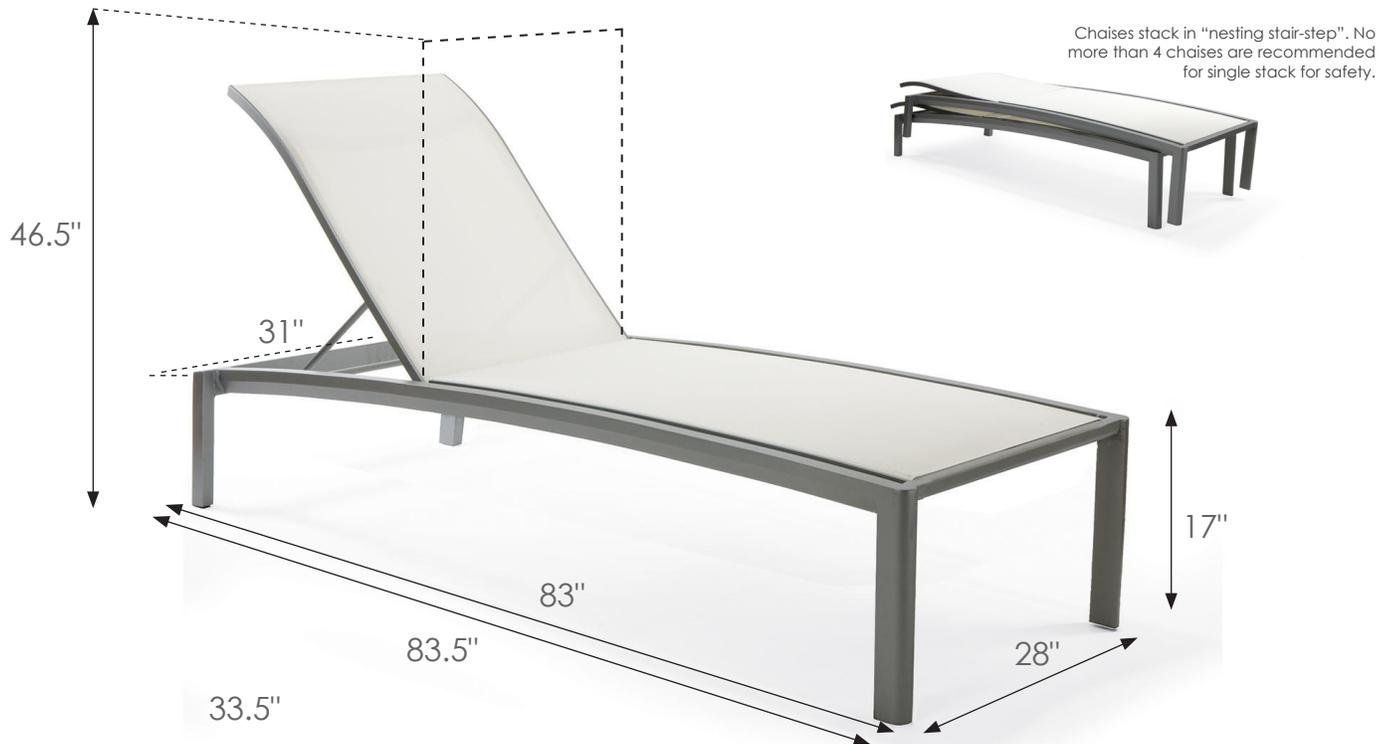

Unit Weight: 35 lbs.

FRAMES: Chair legs are made from quality 1" x 1 1/2" x .090 aluminum extrusion, Tig-Welded at all connecting points. Right seat and back sling rails are attached to frame with stainless steel hardware.

POWDER COAT: The painting process begins with a six (6) stage chemical pre-treatment system, which provides for efficient etching and surface preparation. Frames are thoroughly cleaned in a phosphate bath and sealed with a chrome seal for corrosion resistance, then thoroughly dried in ovens. Powder coatings are electro statically applied to a nominal thickness of three (3) mils with the finest professional grade polyester powder. The frames then pass through an oven heated to 400 degrees Fahrenheit, where the powder melts, covering the metal with a tough, pliable skin.

FABRIC: Winston woven vinyl fabrics are made from weather weave, an open weave, vinyl-coated, polyester fiber fabric. Ultraviolet stabilizers have been added to inhibit fading, deterioration and mildew.

Texacraft® reserves the right to make minor changes or modifications and to discontinue finish color, strap color, fabrics, or styles without notice. Measurements given are approximate. Information provided is as accurate as possible.